



FUNCTIONS

- ON/OFF
- AUTO-ON / OFF
- RESET (set display to zero)
- mm/inch
- LOCK function (key lock)

FEATURES


- High contrast analog display
- Locking screw above
- Lapped guideway
- Measuring blade for inside measurements
- Slide and beam made of hardened stainless steel
- Step measuring function
- Immediate measurements due to the Reference System
- Raised guideway for the protection of the scale
- Dirt wipers are integrated in the slide
- **Digit height:** 11 mm
- **Data interface:** none
- **Energy supply:** Battery life approx. 3 years
- **IP protection category:** None
- **Package contains:** instruction manual, battery, case



TECHNICAL DATA


Order no.	Type	Measuring range	Measuring range inch	Numerical increment	Error limit	Error limit inches (text)	Standard	Depth rod	Friction wheel
		mm	inch	mm/inch	mm	inch			
4103010	16 ER	0 –150	0 –6"	0.01 / .0005"	0.03	.001"	DIN 862	round	
4103011	16 ER	0 –150	0 –6"	0.01 / .0005"	0.03	.001"	DIN 862	round	•
4103012	16 ER	0 –150	0 –6"	0.01 / .0005"	0.03	.001"	DIN 862	rectangular	
4103013	16 ER	0 –150	0 –6"	0.01 / .0005"	0.03	.001"	DIN 862	rectangular	•
4103205	16 ER	0 –200	0 –8"	0.01 / .0005"	0.03	.001"	DIN 862	rectangular	
4103206	16 ER	0 –200	0 –8"	0.01 / .0005"	0.03	.001"	DIN 862	rectangular	•
4103207	16 ER	0 –300	0 –12"	0.01 / .0005"	0.04	.0015"	Factory standard		
4103208	16 ER	0 –300	0 –12"	0.01 / .0005"	0.04	.0015"	Factory standard		•

Order no.	a	b	c	d	e
	mm	mm	mm	mm	mm
4103010	10	40	16	235	16
4103011	10	40	16	235	16
4103012	10	40	16	235	16
4103013	10	40	16	235	16
4103205	10	50	19	285	16
4103206	10	50	19	285	16
4103207	14	64	19	388	16
4103208	14	64	19	388	16

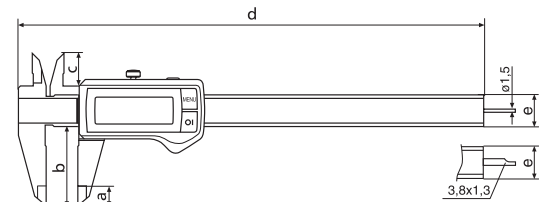

ACCESSORIES

Order no.	Product name	Type
4102020	Depth bridge (75 x 7 mm)	16 Em
4102520	Battery 3 V, CR 2032	



16 Em