

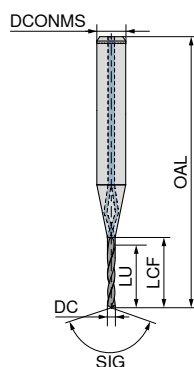


WTX – High Performance Drills

- ▲ Specialised micro drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill



SIG 128°
Solid carbide

10 695 ...

DC _{h6} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	
0,8	3	44	11,2	9,6	00800
0,9	3	46	12,6	10,8	00900
1,0	3	47	14,0	12,0	01000
1,1	3	48	15,4	13,2	01100
1,2	3	50	16,8	14,4	01200
1,3	3	51	18,2	15,6	01300
1,4	3	52	19,6	16,8	01400
1,5	3	53	21,0	18,0	01500
1,6	3	55	22,4	19,2	01600
1,7	3	56	23,8	20,4	01700
1,8	3	57	25,2	21,6	01800
1,9	3	59	26,6	22,8	01900
2,0	3	60	28,0	24,0	02000
2,1	3	61	29,4	25,2	02100
2,2	3	63	30,8	26,4	02200
2,3	3	64	32,2	27,6	02300
2,4	3	65	33,6	28,8	02400
2,5	3	67	35,0	30,0	02500
2,6	3	68	36,4	31,2	02600
2,7	3	69	37,8	32,4	02700
2,8	3	70	39,2	33,6	02800
2,9	3	72	40,6	34,8	02900




P	●
M	●
K	●
N	●
S	○
H	
O	

→ v_c Page 138
→ Machining information: Page 161

Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- ▲ Specialised micro deep hole drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill

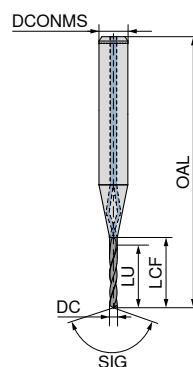

SIG 128°
Solid carbide

10 696 ...

DC _{h6} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	
0,8	3	48	14,4	12,8	00800
0,9	3	49	16,2	14,4	00900
1,0	3	51	18,0	16,0	01000
1,1	3	53	19,8	17,6	01100
1,2	3	54	21,6	19,2	01200
1,3	3	56	23,4	20,8	01300
1,4	3	58	25,2	22,4	01400
1,5	3	60	27,0	24,0	01500
1,6	3	61	28,8	25,6	01600
1,7	3	63	30,6	27,2	01700
1,8	3	65	32,4	28,8	01800
1,9	3	66	34,2	30,4	01900
2,0	3	68	36,0	32,0	02000
2,1	3	70	37,8	33,6	02100
2,2	3	71	39,6	35,2	02200
2,3	3	73	41,4	36,8	02300
2,4	3	75	43,2	38,4	02400
2,5	3	77	45,0	40,0	02500
2,6	3	78	46,8	41,6	02600
2,7	3	80	48,6	43,2	02700
2,8	3	82	50,4	44,8	02800
2,9	3	83	52,2	46,4	02900

P	●
M	●
K	●
N	●
S	○
H	
O	

→ v_c Page 139
→ Machining information: Page 161

Minimum coolant pressure: 30 bar