

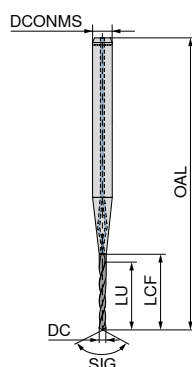


WTX – High performance deep hole drills

- ▲ Specialised micro deep hole drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill



SIG 128°
Solid carbide

10 697 ...

DC _{h6} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	
0,8	3	51	17,6	16	00800
0,9	3	53	19,8	18	00900
1,0	3	55	22,0	20	01000
1,1	3	57	24,2	22	01100
1,2	3	59	26,4	24	01200
1,3	3	61	28,6	26	01300
1,4	3	63	30,8	28	01400
1,5	3	66	33,0	30	01500
1,6	3	68	35,2	32	01600
1,7	3	70	37,4	34	01700
1,8	3	72	39,6	36	01800
1,9	3	74	41,8	38	01900
2,0	3	76	44,0	40	02000
2,1	3	78	46,2	42	02100
2,2	3	80	48,4	44	02200
2,3	3	82	50,6	46	02300
2,4	3	85	52,8	48	02400
2,5	3	87	55,0	50	02500
2,6	3	89	57,2	52	02600
2,7	3	91	59,4	54	02700
2,8	3	93	61,6	56	02800
2,9	3	95	63,8	58	02900

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 139




→ Machining information: Page 161



Minimum coolant pressure: 30 bar

WTX – High performance deep hole drills

- ▲ Specialised micro deep hole drill
- ▲ Universal application
- ▲ Extremely high process security
- ▲ Pilot drill: 5xD WTX Micro – high-performance drill

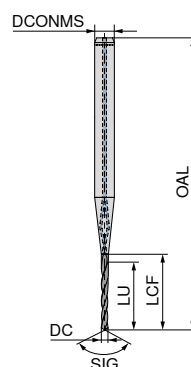

SIG 128°
Solid carbide

10 698 ...

DC _{h6} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	
0,8	3	54	21,6	16,0	00800
0,9	3	57	24,3	20,5	00900
1,0	3	60	27,0	25,0	01000
1,1	3	63	29,7	27,5	01100
1,2	3	65	32,4	30,0	01200
1,3	3	68	35,1	32,5	01300
1,4	3	71	37,8	35,0	01400
1,5	3	73	40,5	37,5	01500
1,6	3	76	43,2	40,0	01600
1,7	3	78	45,9	42,5	01700
1,8	3	81	48,6	45,0	01800
1,9	3	84	51,3	47,5	01900
2,0	3	86	54,0	50,0	02000
2,1	3	89	56,7	52,5	02100
2,2	3	91	59,4	55,0	02200
2,3	3	94	62,1	57,5	02300
2,4	3	97	64,8	60,0	02400
2,5	3	99	67,5	62,5	02500
2,6	3	102	70,2	65,0	02600
2,7	3	104	72,9	67,5	02700
2,8	3	107	75,6	70,0	02800
2,9	3	110	78,3	72,5	02900

P	●
M	●
K	●
N	
S	
H	
O	

→ v_c Page 139

→ Machining information: Page 161



Minimum coolant pressure: 30 bar