
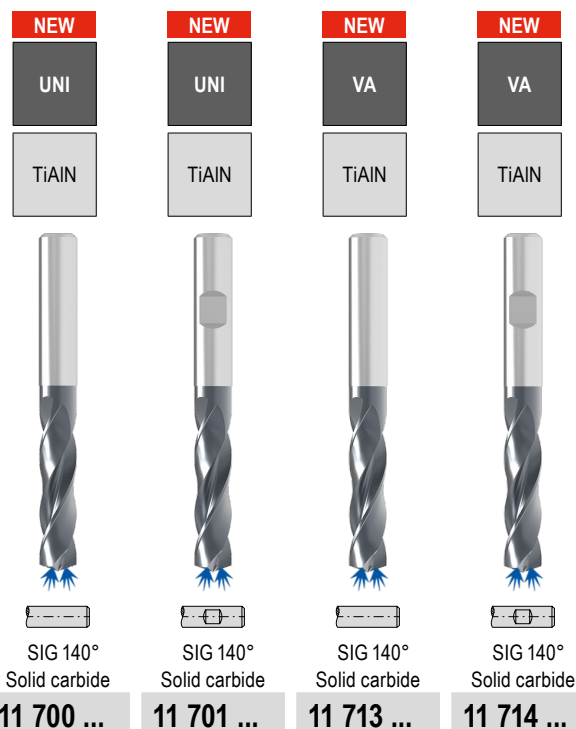



High Performance Drill, DIN 6537

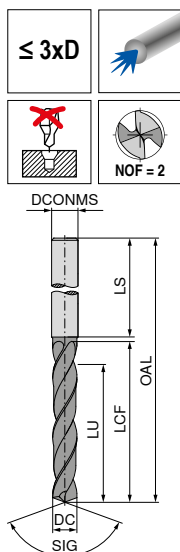

DC _{m7/h7} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	LS mm				
1,00	4	45	7	5,5	28		01000		01000
1,10	4	45	7	5,3	28		01100		01100
1,20	4	45	7	5,2	28		01200		01200
1,30	4	45	7	5,0	28		01300		01300
1,40	4	45	7	4,9	28		01400		01400
1,50	4	55	14	11,7	28		01500		01500
1,60	4	55	14	11,6	28		01600		01600
1,70	4	55	14	11,4	28		01700		01700
1,80	4	55	14	11,3	28		01800		01800
1,90	4	55	14	11,1	28		01900		01900
2,00	4	55	20	17,0	28		02000		02000
2,10	4	55	20	16,8	28		02100		02100
2,20	4	55	20	16,7	28		02200		02200
2,30	4	55	20	16,5	28		02300		02300
2,40	4	55	20	16,4	28		02400		02400
2,50	4	55	20	16,2	28		02500		02500
2,60	4	55	20	16,1	28		02600		02600
2,70	4	55	20	15,9	28		02700		02700
2,80	4	55	20	15,8	28		02800		02800
2,90	4	55	20	15,6	28		02900		02900
3,00	6	62	20	15,5	36		03000	03000	03000
3,10	6	62	20	15,3	36		03100	03100	03100
3,20	6	62	20	15,2	36		03200	03200	03200
3,25	6	62	20	15,1	36		03250	03250	03250
3,30	6	62	20	15,0	36		03300	03300	03300
3,40	6	62	20	14,9	36		03400	03400	03400
3,50	6	62	20	14,7	36		03500	03500	03500
3,60	6	62	20	14,6	36		03600	03600	03600
3,70	6	62	20	14,4	36		03700	03700	03700
3,80	6	66	24	18,3	36		03800	03800	03800
3,90	6	66	24	18,1	36		03900	03900	03900
4,00	6	66	24	18,0	36		04000	04000	04000
4,10	6	66	24	17,8	36		04100	04100	04100
4,20	6	66	24	17,7	36		04200	04200	04200
4,30	6	66	24	17,5	36		04300	04300	04300
4,40	6	66	24	17,4	36		04400	04400	04400
4,50	6	66	24	17,2	36		04500	04500	04500
4,60	6	66	24	17,1	36		04600	04600	04600
4,65	6	66	24	17,0	36		04650	04650	04650
4,70	6	66	24	16,9	36		04700	04700	04700
P						●	●	○	○
M						●	●	●	●
K						●	●		
N						○	○	●	●
S								○	○
H									
O								○	○

→ v_c Page 127+131Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA

High Performance Drill, DIN 6537

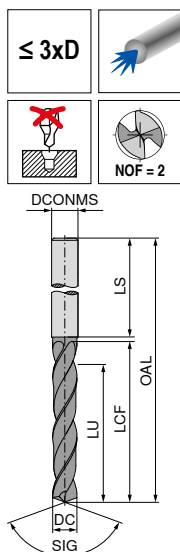

NEW	NEW	NEW	NEW
UNI	UNI	VA	VA
TiAlN	TiAlN	TiAlN	TiAlN
SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
11 700 ...	11 701 ...	11 713 ...	11 714 ...
04800	04800	04800	04800
04900	04900	04900	04900
05000	05000	05000	05000
05100	05100	05100	05100
05200	05200	05200	05200
05300	05300	05300	05300
05400	05400	05400	05400
05500	05500	05500	05500
05600	05600	05600	05600
05650	05650	05600	05600
05700	05700	05700	05700
05800	05800	05800	05800
05900	05900	05900	05900
06000	06000	06000	06000
06100	06100	06100	06100
06200	06200	06200	06200
06300	06300	06300	06300
06400	06400	06400	06400
06500	06500	06500	06500
06600	06600	06600	06600
06700	06700	06700	06700
06800	06800	06800	06800
06900	06900	06900	06900
07000	07000	07000	07000
07100	07100	07100	07100
07200	07200	07200	07200
07300	07300	07300	07300
07400	07400	07400	07400
07500	07500	07500	07500
07550	07550	07500	07500
07600	07600	07600	07600
07650	07650	07600	07600
07700	07700	07700	07700
07800	07800	07800	07800
07900	07900	07900	07900
08000	08000	08000	08000
08100	08100	08100	08100
08200	08200	08200	08200
08300	08300	08300	08300



DC _{m7/h7} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	LS mm
4,80	6	66	28	20,8	36
4,90	6	66	28	20,6	36
5,00	6	66	28	20,5	36
5,10	6	66	28	20,3	36
5,20	6	66	28	20,2	36
5,30	6	66	28	20,0	36
5,40	6	66	28	19,9	36
5,50	6	66	28	19,7	36
5,55	6	66	28	19,6	36
5,60	6	66	28	19,6	36
5,65	6	66	28	19,5	36
5,70	6	66	28	19,4	36
5,80	6	66	28	19,3	36
5,90	6	66	28	19,1	36
6,00	6	66	28	19,0	36
6,10	8	79	34	24,8	36
6,20	8	79	34	24,7	36
6,30	8	79	34	24,5	36
6,40	8	79	34	24,4	36
6,50	8	79	34	24,2	36
6,60	8	79	34	24,1	36
6,70	8	79	34	23,9	36
6,80	8	79	34	23,8	36
6,90	8	79	34	23,6	36
7,00	8	79	34	23,5	36
7,10	8	79	41	30,3	36
7,20	8	79	41	30,2	36
7,30	8	79	41	30,0	36
7,40	8	79	41	29,9	36
7,50	8	79	41	29,7	36
7,55	8	79	41	29,6	36
7,60	8	79	41	29,6	36
7,65	8	79	41	29,5	36
7,70	8	79	41	29,4	36
7,80	8	79	41	29,3	36
7,90	8	79	41	29,1	36
8,00	8	79	41	29,0	36
8,10	10	89	47	34,8	40
8,20	10	89	47	34,7	40
8,30	10	89	47	34,5	40

P	•	•	○	○
M	•	•	•	•
K	•	•	•	•
N	○	○	•	•
S			○	○
H				
O			○	○

→ v_c Page 127+131

 Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA


High Performance Drill, DIN 6537

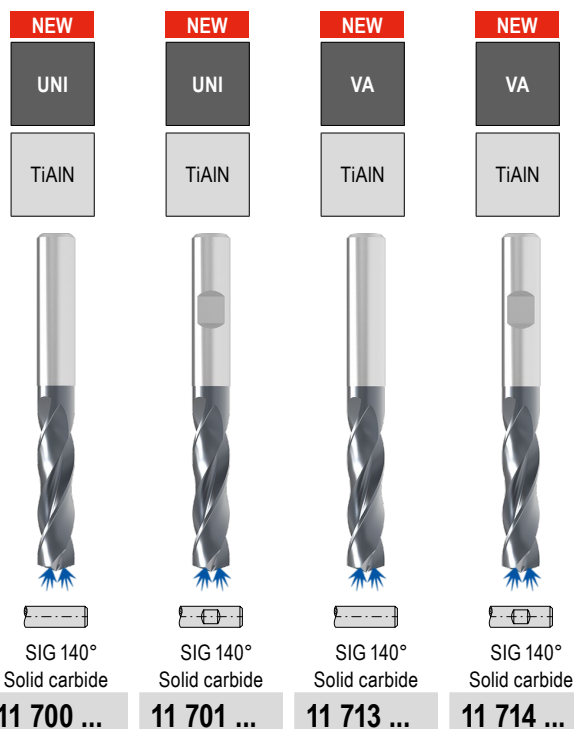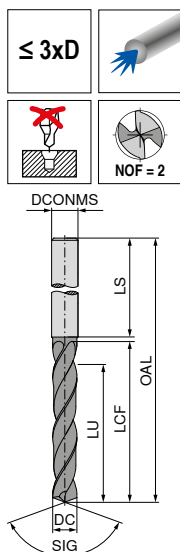

DC _{m7/h7} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	LS mm				
8,40	10	89	47	34,4	40		08400	08400	08400
8,50	10	89	47	34,2	40		08500	08500	08500
8,60	10	89	47	34,1	40		08600	08600	08600
8,70	10	89	47	33,9	40		08700	08700	08700
8,80	10	89	47	33,8	40		08800	08800	08800
8,90	10	89	47	33,6	40		08900	08900	08900
9,00	10	89	47	33,5	40		09000	09000	09000
9,10	10	89	47	33,3	40		09100	09100	09100
9,20	10	89	47	33,2	40		09200	09200	09200
9,30	10	89	47	33,0	40		09300	09300	09300
9,40	10	89	47	32,9	40		09400	09400	09400
9,50	10	89	47	32,7	40		09500	09500	09500
9,60	10	89	47	32,6	40		09600	09600	09600
9,70	10	89	47	32,4	40		09700	09700	09700
9,80	10	89	47	32,3	40		09800	09800	09800
9,90	10	89	47	32,1	40		09900	09900	09900
10,00	10	89	47	32,0	40		10000	10000	10000
10,10	12	102	55	39,8	45		10100	10100	10100
10,20	12	102	55	39,7	45		10200	10200	10200
10,30	12	102	55	39,5	45		10300	10300	10300
10,40	12	102	55	39,4	45		10400	10400	10400
10,50	12	102	55	39,2	45		10500	10500	10500
10,60	12	102	55	39,1	45		10600	10600	10600
10,70	12	102	55	38,9	45		10700	10700	10700
10,80	12	102	55	38,8	45		10800	10800	10800
10,90	12	102	55	38,6	45		10900	10900	10900
11,00	12	102	55	38,5	45		11000	11000	11000
11,10	12	102	55	38,3	45		11100	11100	11100
11,20	12	102	55	38,2	45		11200	11200	11200
11,30	12	102	55	38,0	45		11300	11300	11300
11,40	12	102	55	37,9	45		11400	11400	11400
11,50	12	102	55	37,7	45		11500	11500	11500
11,60	12	102	55	37,6	45		11600	11600	11600
11,70	12	102	55	37,4	45		11700	11700	11700
11,80	12	102	55	37,3	45		11800	11800	11800
11,90	12	102	55	37,1	45		11900	11900	11900
12,00	12	102	55	37,0	45		12000	12000	12000
12,20	14	107	60	41,7	45		12200	12200	12200
12,30	14	107	60	41,5	45		12300	12300	12300
12,50	14	107	60	41,2	45		12500	12500	12500
P						●	●	○	○
M						●	●	●	●
K						●	●		
N						○	○	●	●
S								○	○
H									
O								○	○

→ v_c Page 127+131Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA

High Performance Drill, DIN 6537

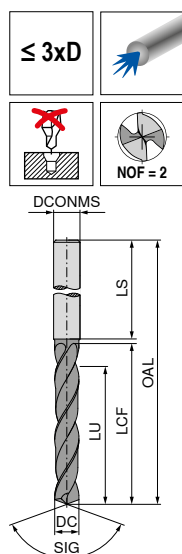

NEW	NEW	NEW	NEW
UNI	UNI	VA	VA
TiAlN	TiAlN	TiAlN	TiAlN
SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
11 700 ...	11 701 ...	11 713 ...	11 714 ...
12700	12700	12700	12700
12800	12800	12800	12800
12900	12900	12900	12900
13000	13000	13000	13000
13500	13500	13500	13500
		13700	13700
13800	13800	13800	13800
14000	14000	14000	14000
14200	14200	14200	14200
14400	14400	14400	14400
14500	14500	14500	14500
		14700	14700
14800	14800	14800	14800
15000	15000	15000	15000
15100	15100	15100	15100
15200	15200	15200	15200
15500	15500	15500	15500
		15700	15700
15800	15800	15800	15800
16000	16000	16000	16000
16500	16500	16500	16500
17000	17000	17000	17000
17500	17500	17500	17500
18000	18000	18000	18000
18500	18500	18500	18500
18900	18900	18900	18900
19000	19000	19000	19000
19300	19300	19300	19300
19500	19500	19500	19500
20000	20000	20000	20000

P	●	●	○	○
M	●	●	●	●
K	●	●	●	●
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 127+131Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA