



Side and face milling cutter HSS-E Co 5

- ▲ Fine cross-pitched version
- ▲ with keyway to DIN 138



DIN 885 A

50 349 ...



DC _{js16} mm	OAH _{k11} mm	DCONMS _{H7} mm	ZEPF	
50	4	16	16	100
50	5	16	16	102
50	6	16	16	104
50	8	16	16	106
50	10	16	16	108
63	4	22	18	200
63	5	22	18	202
63	6	22	18	204
63	8	22	18	206
63	10	22	18	208
63	12	22	18	210
63	14	22	18	212
80	5	27	20	300
80	6	27	20	302
80	8	27	20	304
80	10	27	18	306
80	12	27	18	308
80	14	27	18	310
80	16	27	18	312
80	18	27	18	314
80	20	27	18	316
100	6	32	22	400
100	8	32	22	402
100	10	32	20	404
100	12	32	20	406
100	14	32	20	408
100	16	32	20	410
100	18	32	20	412
100	20	32	20	414
100	25	32	20	418
125	8	32	24	500
125	10	32	22	502
125	12	32	22	504
125	14	32	22	506
125	16	32	22	508
125	18	32	22	510
125	20	32	22	512
125	25	32	22	516
160	10	40	26	600
160	12	40	26	602
160	14	40	26	604
160	16	40	26	606
160	18	40	26	608
160	20	40	26	610
160	25	40	26	614
160	32	40	26	618

P	●
M	○
K	●
N	●
S	○
H	
O	●

→ v_c/f_z Page 45

Narrow side and face milling cutter HSS-E Co 5

- ▲ Fine cross-pitched version
- ▲ with keyway to DIN 138

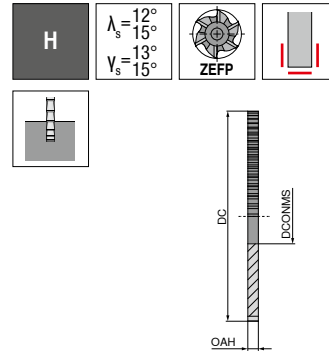

DIN 1834 A

50 340 ...

DC _{js16} mm	OAH _{k11} mm	DCONMS _{H7} mm	ZEPF	
63	1,6	22	28	200
63	2,0	22	28	202
63	2,5	22	28	204
63	3,0	22	28	206
80	1,6	27	32	300
80	2,0	27	32	302
80	2,5	27	32	304
80	3,0	27	32	306
80	4,0	27	32	310
100	1,6	32	36	400
100	2,0	32	36	402
100	2,5	32	36	404
100	3,0	32	36	406
100	4,0	32	36	410
100	5,0	32	36	414
125	1,6	32	40	500
125	2,0	32	40	502
125	2,5	32	40	504
125	3,0	32	40	506
125	4,0	32	40	510
125	5,0	32	40	514
125	6,0	32	40	516
160	2,0	40	48	600
160	2,5	40	48	602
160	3,0	40	48	604
160	4,0	40	48	606
160	5,0	40	48	608
160	6,0	40	48	610
160	8,0	40	36	612

P	●
M	○
K	●
N	●
S	●
H	
O	●

→ v_c/f_z Page 45