

HF750

Vision Measurement Systems

Optical Comparators

Software

Starrett

HF750



HORIZONTAL FLOOR STANDING OPTICAL COMPARATOR

HF750

Utilizing the same exemplary build standards as the HF600, the HF750 super capacity optical comparator delivers benefits from an even larger 30" (762mm) screen, setting a new standard for clarity and brightness. Ideal for use over a broad spectrum of industries and applications, the HF750 is designed and built to satisfy the requirements of measuring small to large work pieces with total precision, ruggedness, and efficiency. The geometric software measures diameter, radius, angle, line and point features, plus part skewing for faster setup. The HF750 is available with optical edge detection or video edge detection with advanced software and OV2 or TOV2 video camera options.


FEATURES AND SPECIFICATIONS

- 12" x 8" X-Y travel workstage (300 x 200mm)
- All metal construction with nickel plated stage tooling plate
- 30" (762mm) diameter screen with precision cross lines and overlay clips
- Motorized X and Y axes standard
- Two-axis power drive via joystick and variable speed control for fine adjust
- Projection lens turret with three lens capacity (lenses not included)
- Turret mounted condenser system and yellow/green filter and provision to mount further accessories
- Stage Weight Capacity: 330lbs (150kg) (evenly distributed)
- Workstage capacity between centers 17.5" (440mm)
- Fully retractable duplex fiber optic surface illumination
- Halogen profile and surface illumination
- 20µin (0.5µm) resolution Heidenhain linear scales
- Screen driven rotary Q-axis with 1' resolution
- Available with MetLogix™ tablet, M2 measuring software with touch screen and PC, or Mx-Series digital readout systems

OPTIONS

- Six interchangeable lens magnifications including 10x, 20x, 25x, 31.25x, 50x and 100x
- Optional 5x fixed or 5x interchangeable on a 3-lens turret available by special order
- Interchangeable OV2 video camera system with 6.5:1 zoom lens
- Interchangeable TOV2 telecentric video camera systems with choice of 0.16x, 0.3x or 0.5x fixed magnification lenses
- Extended Stage Travel: 20" (500mm) X-axis; 8" (200mm) Y-axis
- Fully automatic CNC controls
- Automatic optical edge detection
- Automatic video edge detection available only with OV2 and TOV2 video camera systems
- Swing-away lamp house
- Extensive line of accessories
- Complete with full canopy and curtains


Universal Vee Block on Rotary Base

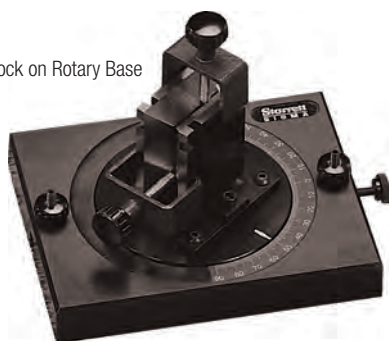

Click the QR code to view the HF750



HF750

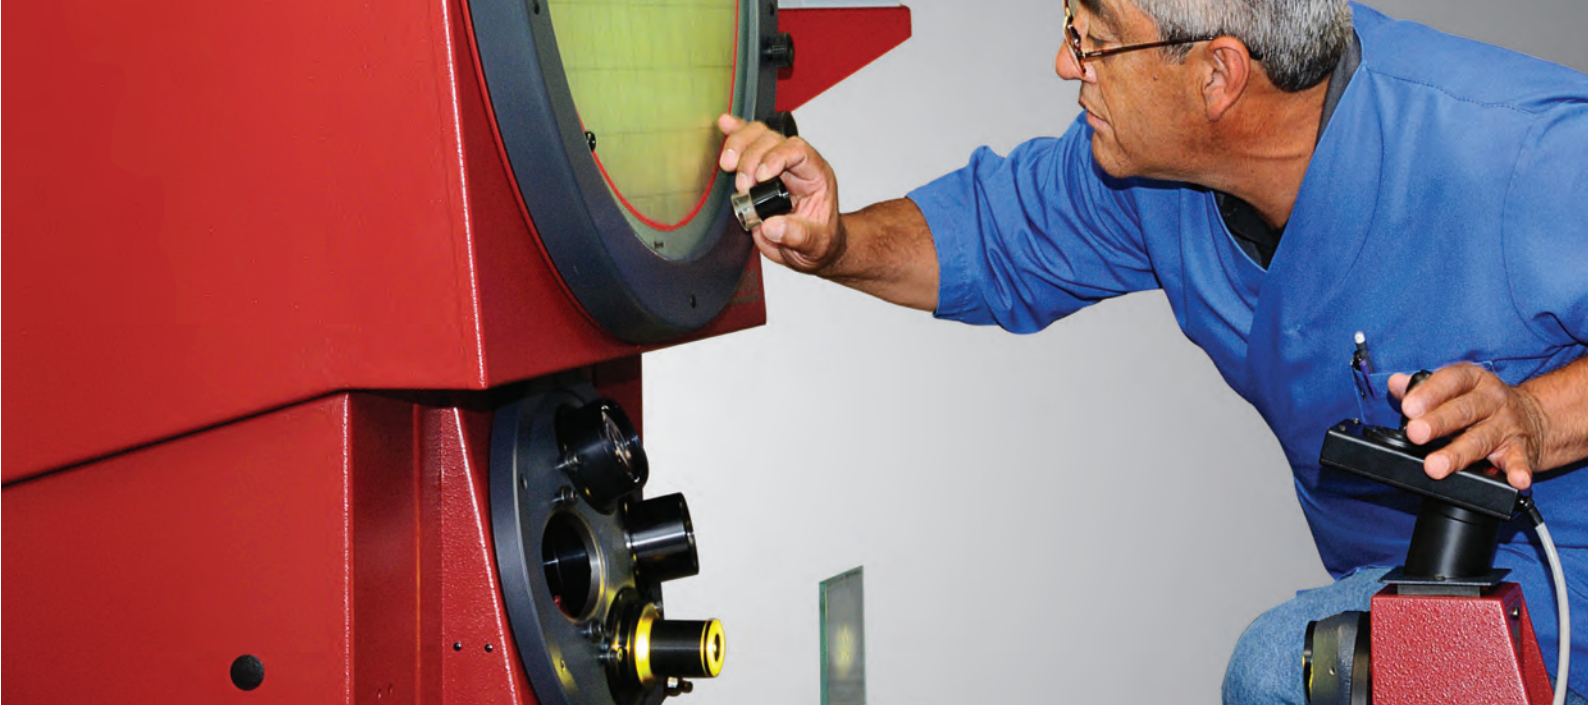

OPERATOR INTERFACE

Feature	M1	M2	M3	Mx100	Mx200
Optical edge detection (Option)	x	x	x	—	x
Geometric Functions	x	x	x	—	x
Graphic Based Constructions	—	x	x	—	x
Tolerancing	—	x	x	—	x
Data export reporting	x	x	x	x	x
Part programming and playback	—	x	x	—	x
Operating system	MLX Android™	MS Windows®	Windows®	MLX Android™	MLX Android™
Part view display	—	x	x	—	—
Feature annotation	—	x	x	—	—
CNC drive option	—	—	x	—	—
Video edge detection (option)	—	—	x	—	—
CAD file import and export option	—	—	x	—	—
Software developer	MetLogix™	MetLogix™	MetLogix™	MetLogix™	MetLogix™

SPECIFICATIONS


	HF750
Horizontal Travel	12" (300mm)
Vertical Travel	8" (200mm)
Focus Travel	3" (75mm)
Top Plate*	25 x 9" (635 x 230mm)
Image	Erect and reversed

*With machined slots for easy fixturing

WEIGHT AND DIMENSIONS

	HF750
Net Weight	1660lbs 753kg
Shipping Weight	1800lbs 817kg
Crated Dimensions	96" x 48" x 91" 244cm x 124cm x 231cm

HF750 DIMENSIONS

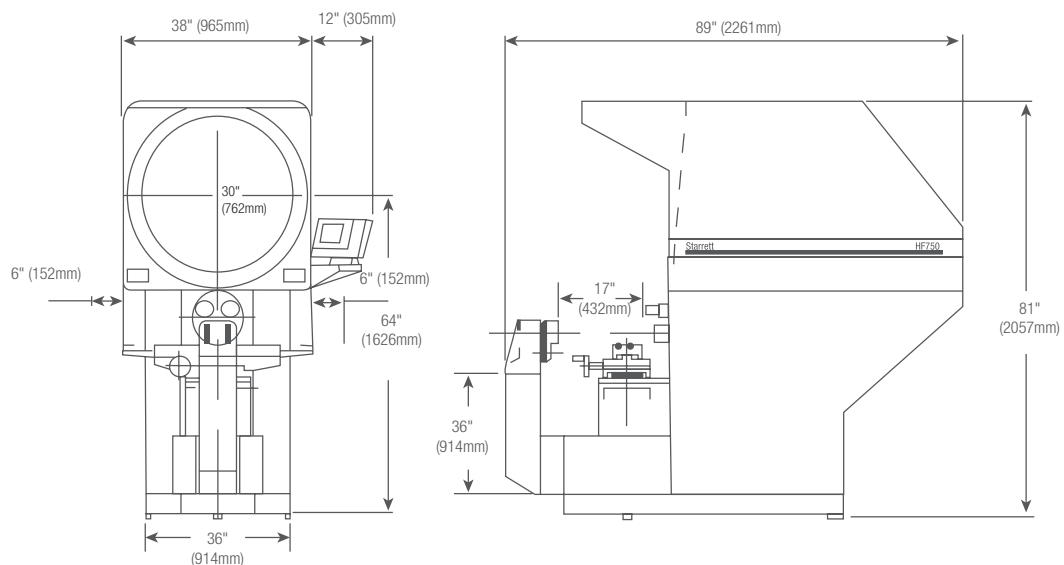

STARRETT PRODUCT LINES

Band Saw Blades

Force Measurement

Jobsite & Workshop Tools

Laser Measurement

Metrology Equipment

Precision Granite

Precision Ground Solutions

Precision Measuring Tools

PTA & Hand Tools

Service

Webber Gage Blocks

METROLOGY SYSTEMS



www.starrett-metrology.co.uk

Follow us!



Starrett[®]

Phone: 00 44 (0)1835 863501 | Email: Metrology@starrett.co.uk

Oxnam Road, Jedburgh TD8 6LR Scotland UK