


High Performance Drill, DIN 6537

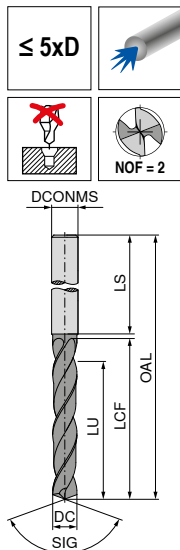


DC _{m7h7} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	LS mm
1,00	4	55	8	6,5	28
1,10	4	55	12	10,3	28
1,20	4	55	12	10,2	28
1,30	4	55	12	10,0	28
1,40	4	55	12	9,9	28
1,50	4	55	12	9,7	28
1,60	4	55	16	13,6	28
1,70	4	55	16	13,4	28
1,80	4	55	16	13,3	28
1,90	4	55	16	13,1	28
2,00	4	57	21	18,0	28
2,10	4	57	21	17,8	28
2,20	4	57	21	17,7	28
2,30	4	57	21	17,5	28
2,40	4	57	21	17,4	28
2,50	4	57	21	17,2	28
2,60	4	57	21	17,1	28
2,70	4	57	21	16,9	28
2,80	4	57	21	16,8	28
2,90	4	57	21	16,6	28
3,00	6	66	28	23,5	36
3,10	6	66	28	23,3	36
3,20	6	66	28	23,2	36
3,25	6	66	28	23,1	36
3,30	6	66	28	23,0	36
3,40	6	66	28	22,9	36
3,50	6	66	28	22,7	36
3,60	6	66	28	22,6	36
3,70	6	66	28	22,4	36
3,80	6	74	36	30,3	36
3,85	6	74	36	30,2	36
3,90	6	74	36	30,1	36
4,00	6	74	36	30,0	36
4,10	6	74	36	29,8	36
4,20	6	74	36	29,7	36
4,30	6	74	36	29,5	36
4,40	6	74	36	29,4	36
4,50	6	74	36	29,2	36
4,60	6	74	36	29,1	36
4,65	6	74	36	29,0	36
4,70	6	74	36	28,9	36
4,80	6	82	44	36,8	36
4,90	6	82	44	36,6	36
5,00	6	82	44	36,5	36
5,10	6	82	44	36,3	36

P	●	●	○	○
M	●	●	●	●
K	●	●	●	●
N	○	○	●	●
S			○	○
H				
O			○	○

UNI	UNI	VA	VA
TiAlN	TiAlN	TiAlN	TiAlN
SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
11 702 ...	11 703 ...	11 715 ...	11 716 ...
01000		01000	
01100		01100	
01200		01200	
01300		01300	
01400		01400	
01500		01500	
01600		01600	
01700		01700	
01800		01800	
01900		01900	
02000		02000	
02100		02100	
02200		02200	
02300		02300	
02400		02400	
02500		02500	
02600		02600	
02700		02700	
02800		02800	
02900		02900	
03000	03000	03000	03000
03100	03100	03100	03100
03200	03200	03200	03200
03250	03250		
03300	03300	03300	03300
03400	03400	03400	03400
03500	03500	03500	03500
03600	03600	03600	03600
03700	03700	03700	03700
03800	03800	03800	03800
03850	03850		
03900	03900	03900	03900
04000	04000	04000	04000
04100	04100	04100	04100
04200	04200	04200	04200
04300	04300	04300	04300
04400	04400	04400	04400
04500	04500	04500	04500
04600	04600	04600	04600
04650	04650		
04700	04700	04700	04700
04800	04800	04800	04800
04900	04900	04900	04900
05000	05000	05000	05000
05100	05100	05100	05100

→ v_c Page 129+133Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA

High Performance Drill, DIN 6537


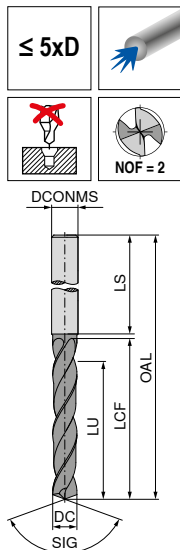


UNI	UNI	VA	VA
TiAlN	TiAlN	TiAlN	TiAlN
SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide	SIG 140° Solid carbide
11 702 ...	11 703 ...	11 715 ...	11 716 ...
05200	05200	05200	05200
05300	05300	05300	05300
05400	05400	05400	05400
05500	05500	05500	05500
05600	05600	05600	05600
05700	05700	05700	05700
05800	05800	05800	05800
05900	05900	05900	05900
06000	06000	06000	06000
06100	06100	06100	06100
06200	06200	06200	06200
06300	06300	06300	06300
06400	06400	06400	06400
06500	06500	06500	06500
06600	06600	06600	06600
06700	06700	06700	06700
06800	06800	06800	06800
06900	06900	06900	06900
07000	07000	07000	07000
07100	07100	07100	07100
07200	07200	07200	07200
07300	07300	07300	07300
07400	07400	07400	07400
07500	07500	07500	07500
07600	07600	07600	07600
07700	07700	07700	07700
07800	07800	07800	07800
07900	07900	07900	07900
08000	08000	08000	08000
08100	08100	08100	08100
08200	08200	08200	08200
08300	08300	08300	08300
08400	08400	08400	08400
08500	08500	08500	08500
08600	08600	08600	08600
08700	08700	08700	08700
08800	08800	08800	08800
08900	08900	08900	08900
09000	09000	09000	09000
09100	09100	09100	09100

P	●	●	○	○
M	●	●	●	●
K	●	●	●	●
N	○	○	●	●
S	○	○	○	○
H				
O			○	○

→ v_c Page 129+133

High Performance Drill, DIN 6537

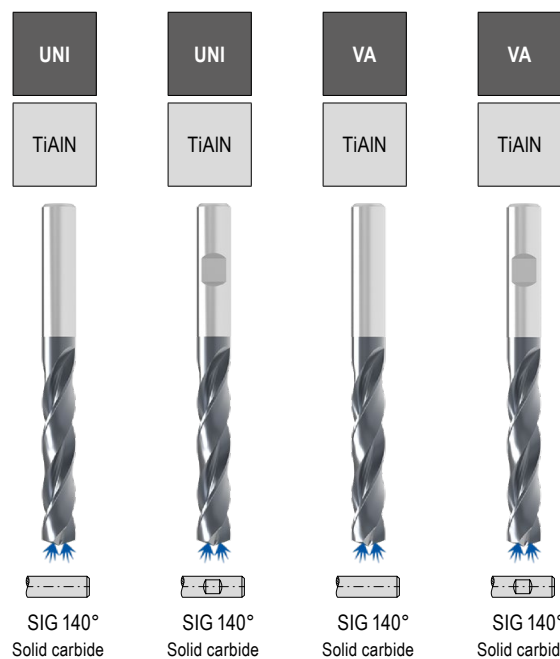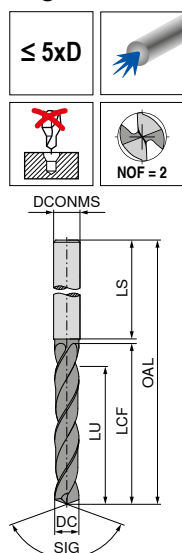



DC _{m7h7} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	LS mm
9,20	10	103	61	47,2	40
9,30	10	103	61	47,0	40
9,40	10	103	61	46,9	40
9,50	10	103	61	46,7	40
9,55	10	103	61	46,6	40
9,60	10	103	61	46,6	40
9,70	10	103	61	46,4	40
9,80	10	103	61	46,3	40
9,90	10	103	61	46,1	40
10,00	10	103	61	46,0	40
10,10	12	118	71	55,8	45
10,20	12	118	71	55,7	45
10,30	12	118	71	55,5	45
10,40	12	118	71	55,4	45
10,50	12	118	71	55,2	45
10,60	12	118	71	55,1	45
10,70	12	118	71	54,9	45
10,80	12	118	71	54,8	45
10,90	12	118	71	54,6	45
11,00	12	118	71	54,5	45
11,10	12	118	71	54,3	45
11,20	12	118	71	54,2	45
11,30	12	118	71	54,0	45
11,40	12	118	71	53,9	45
11,50	12	118	71	53,7	45
11,60	12	118	71	53,6	45
11,70	12	118	71	53,4	45
11,80	12	118	71	53,3	45
11,90	12	118	71	53,1	45
12,00	12	118	71	53,0	45
12,10	14	124	77	58,8	45
12,20	14	124	77	58,7	45
12,40	14	124	77	58,4	45
12,50	14	124	77	58,2	45
12,60	14	124	77	58,1	45
12,70	14	124	77	57,9	45
12,80	14	124	77	57,8	45
13,00	14	124	77	57,5	45
13,10	14	124	77	57,3	45
13,20	14	124	77	57,2	45
13,30	14	124	77	57,0	45
13,50	14	124	77	56,7	45
13,70	14	124	77	56,4	45
13,80	14	124	77	56,3	45
14,00	14	124	77	56,0	45

11 702 ...	11 703 ...	11 715 ...	11 716 ...
09200	09200	09200	09200
09300	09300	09300	09300
09400	09400	09400	09400
09500	09500	09500	09500
09550	09550		
09600	09600	09600	09600
09700	09700	09700	09700
09800	09800	09800	09800
09900	09900	09900	09900
10000	10000	10000	10000
10100	10100	10100	10100
10200	10200	10200	10200
10300	10300	10300	10300
10400	10400	10400	10400
10500	10500	10500	10500
10600	10600	10600	10600
10700	10700	10700	10700
10800	10800	10800	10800
10900	10900	10900	10900
11000	11000	11000	11000
11100	11100	11100	11100
11200	11200	11200	11200
11300	11300	11300	11300
11400	11400	11400	11400
11500	11500	11500	11500
11600	11600	11600	11600
11700	11700	11700	11700
11800	11800	11800	11800
11900	11900	11900	11900
12000	12000	12000	12000
12100	12100	12100	12100
12200	12200	12200	12200
12400	12400	12400	12400
12500	12500	12500	12500
12600	12600	12600	12600
12700	12700	12700	12700
12800	12800	12800	12800
13000	13000	13000	13000
13100	13100	13100	13100
13200	13200	13200	13200
13300	13300	13300	13300
13500	13500	13500	13500
		13700	13700
13800	13800	13800	13800
14000	14000	14000	14000

P	●	●	○	○
M	●	●	●	●
K	●	●	●	●
N	○	○	●	●
S			○	○
H				
O			○	○

→ v_c Page 129+133

High Performance Drill, DIN 6537

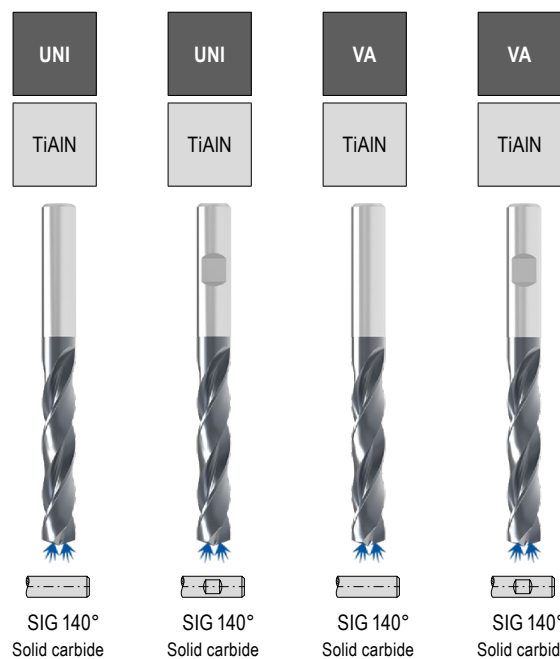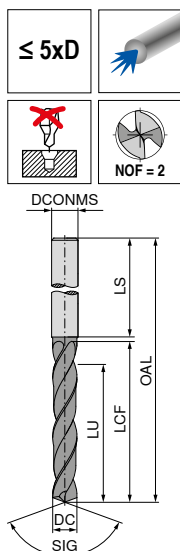

DC _{m7h7} mm	DCONMS _{h6} mm	OAL mm	LCF mm	LU mm	LS mm				
14,20	16	133	83	61,7	48		14200	14200	14200
14,30	16	133	83	61,5	48		14300	14300	14300
14,40	16	133	83	61,4	48		14400	14400	14400
14,50	16	133	83	61,2	48		14500	14500	14500
14,70	16	133	83	60,9	48			14700	14700
14,80	16	133	83	60,8	48		14800	14800	14800
15,00	16	133	83	60,5	48		15000	15000	15000
15,10	16	133	83	60,3	48		15100	15100	15100
15,20	16	133	83	60,2	48		15200	15200	15200
15,25	16	133	83	60,1	48		15250	15250	
15,30	16	133	83	60,0	48		15300	15300	15300
15,50	16	133	83	59,7	48		15500	15500	15500
15,70	16	133	83	59,4	48			15700	15700
15,80	16	133	83	59,3	48		15800	15800	15800
16,00	16	133	83	59,0	48		16000	16000	16000
16,20	18	143	93	68,7	48		16200	16200	16200
16,30	18	143	93	68,5	48		16300	16300	16300
16,50	18	143	93	68,2	48		16500	16500	16500
16,80	18	143	93	67,8	48		16800	16800	16800
17,00	18	143	93	67,5	48		17000	17000	17000
17,30	18	143	93	67,0	48		17300	17300	17300
17,50	18	143	93	66,7	48		17500	17500	17500
18,00	18	143	93	66,0	48		18000	18000	18000
18,50	20	153	101	73,2	50		18500	18500	18500
18,90	20	153	101	72,6	50		18900	18900	18900
19,00	20	153	101	72,5	50		19000	19000	19000
19,20	20	153	101	72,2	50		19200	19200	19200
19,30	20	153	101	72,0	50		19300	19300	19300
19,50	20	153	101	71,7	50		19500	19500	19500
19,70	20	153	101	71,4	50		19700	19700	19700
20,00	20	153	101	71,0	50		20000	20000	20000
P						●	●	○	○
M						●	●	●	●
K						●	●		
N						○	○	●	●
S								○	○
H									
O								○	○

→ v_c Page 129+133Ø DC_{h7} for Type UNI / Ø DC_{m7} for Type VA